

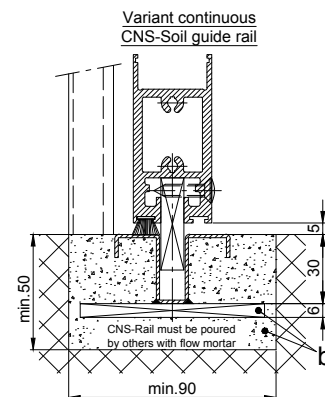

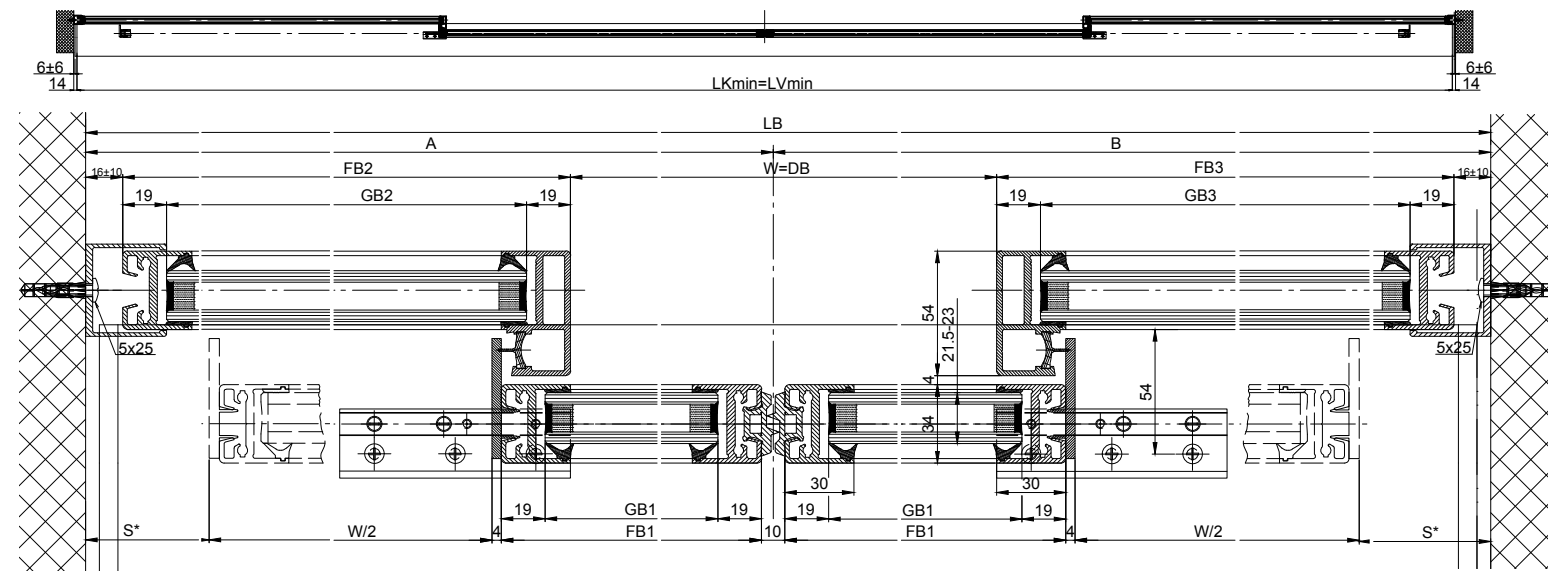


(1:20)

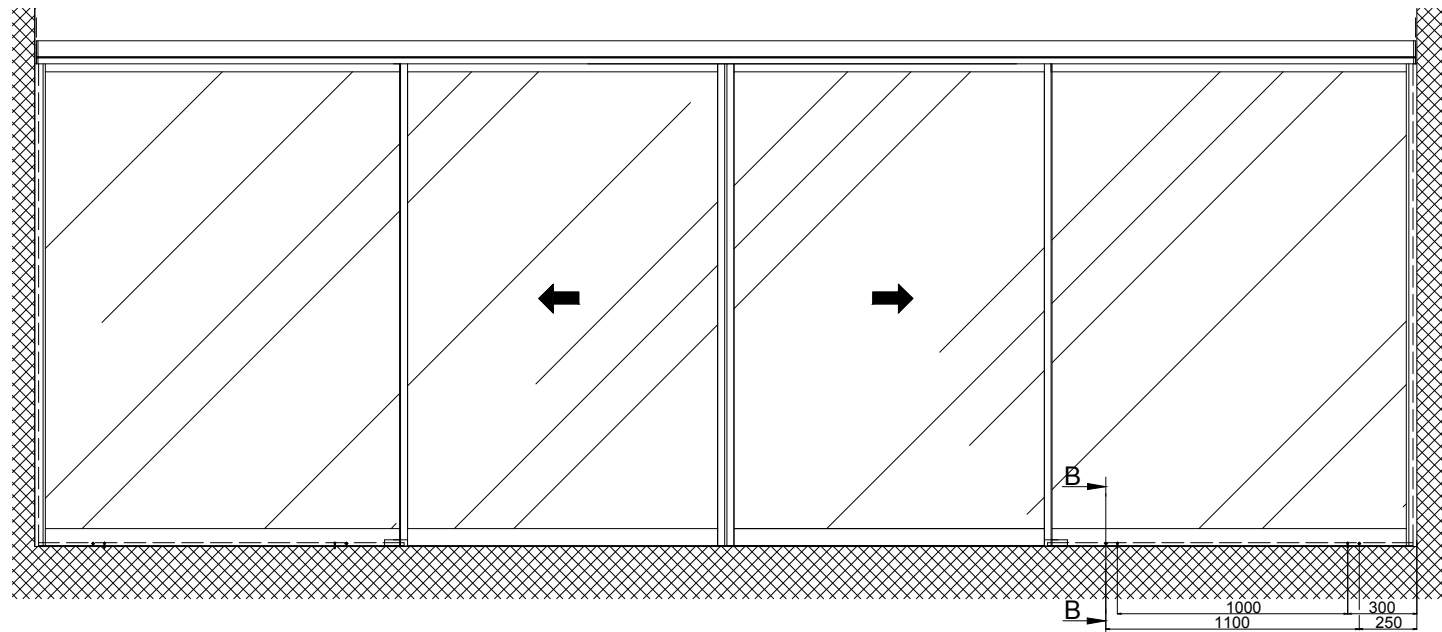

$LB=2W+68+2s$   
 $W=(LB-2s-68)/2$   
 $LKmin=LVmin=LB-28$

$FB1=W/2+25$   
 $FB2=A-(W/2)-16$   
 $FB3=B-(W/2)-16$   
 $GB1=FB1-38$   
 $GB2=FB2-38$   
 $GB3=FB3-38$

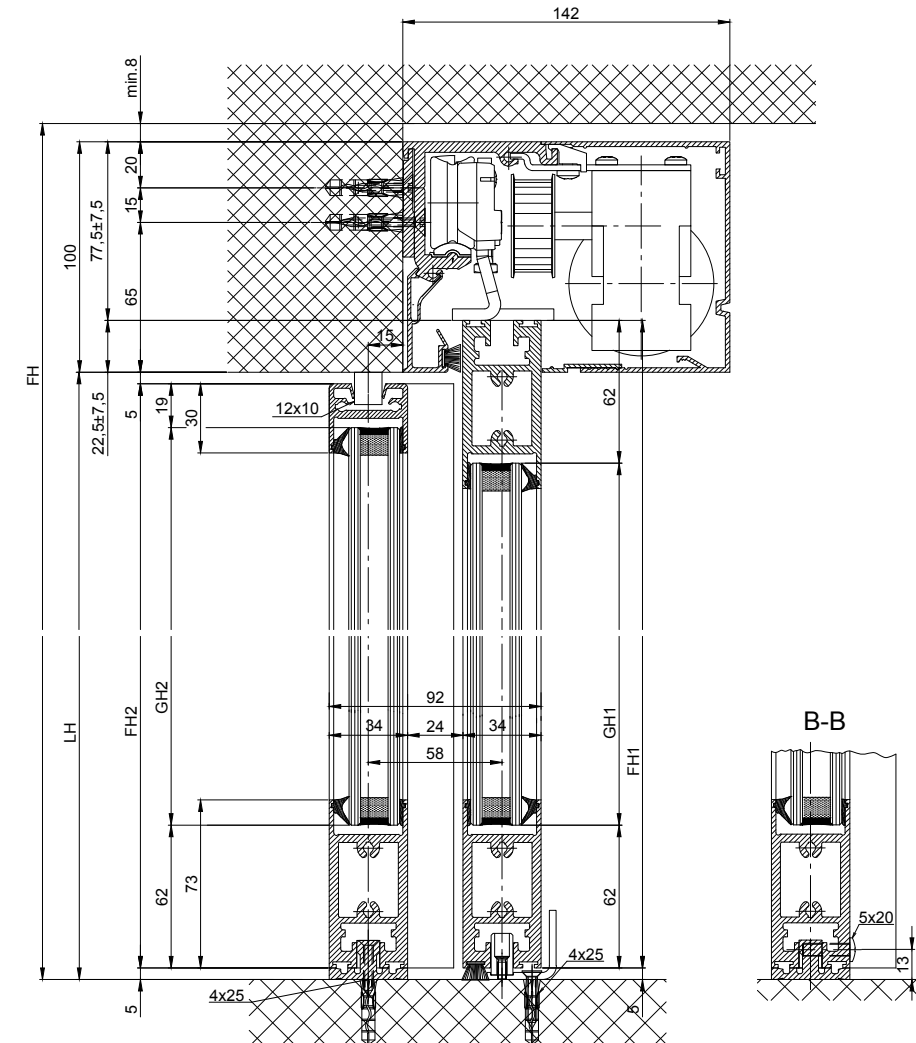

b Executed on site

**Variants of the drive cross section:**

- Header profile 2101/2201/2202 (according to drawing)
- Header profile 2101/2201/2202 H100

The door leaves must be made from material which do not bear any potential risk of injury in any case of breakage (for example single sheet toughened safety glass, compound safety glass etc.). Transparent door leaves must be clearly labelled to be recognised as such.

\* Safety margin according to national regulation

Anodize/color layer thickness: \_\_\_\_\_ Additional info: \_\_\_\_\_  
RAL : \_\_\_\_\_

Object: \_\_\_\_\_

Customer: \_\_\_\_\_

Order-Nr.: \_\_\_\_\_ Date: \_\_\_\_\_ Release signatur: \_\_\_\_\_

Scale: \_\_\_\_\_ Drawn: 28.11.19 MURO  
% ok to print

Operator typ: Profilsystem Execution  
2203-EB LR22B with fixedwing, lintel

TORMAX TORMAX a Division of LANDERT Group AG CH-8180 Bülach-Zürich Document number: T3\_390\_777 Index