(1:20)

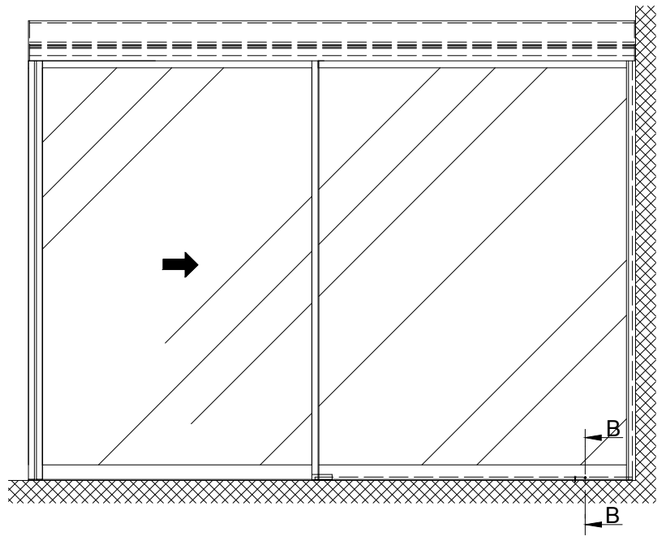



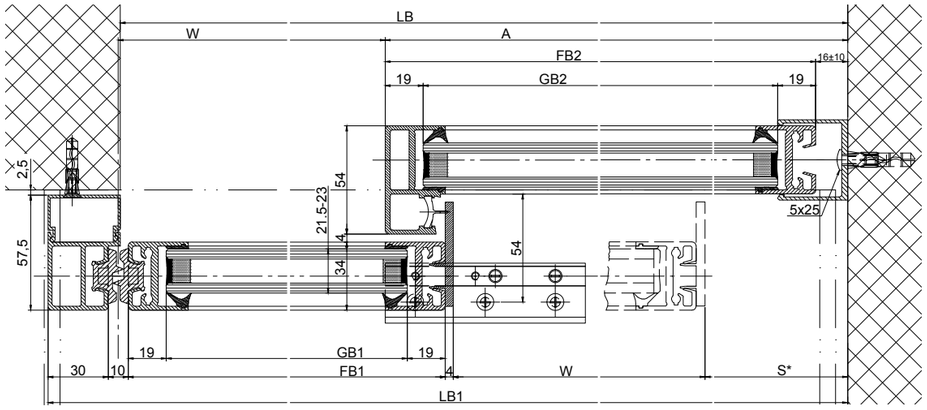

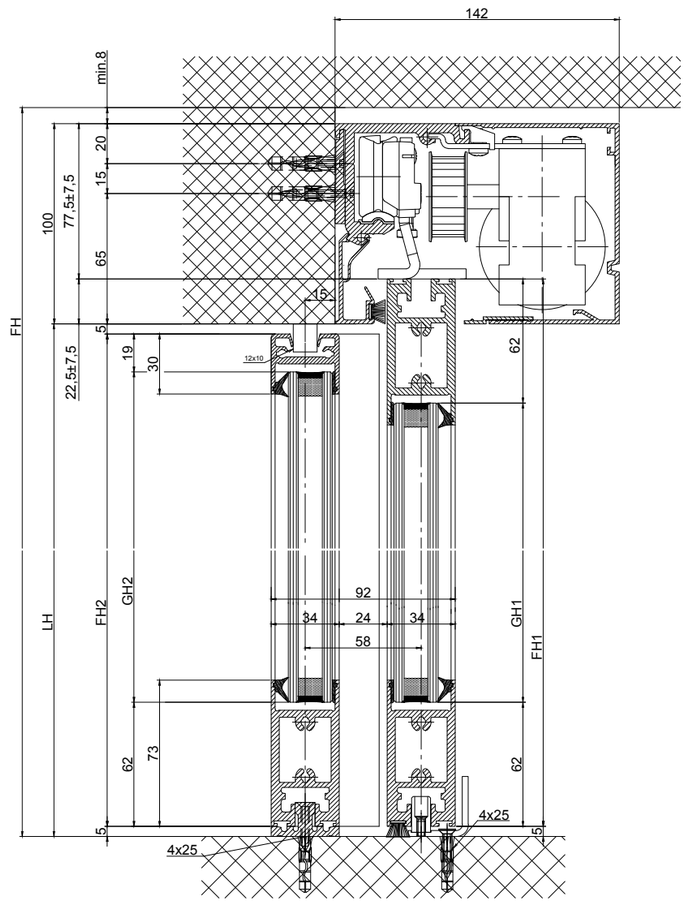



b Executed on site

Variants of the drive cross section:

- Header profile 2101/2201/2202 (according to drawing)
- Header profile 2101/2201/2202 H100

Execution
Single glazing 8.5-10mm



Variant continuous
CNS-Soil guide rail



LB=2W+34+s		FH1=LH+17.5	
W=(LB-34-s)/2		FH2=LH-10	
LB1=LB+35		GH1=FH1-124	
LKmin=LB1-22		GH2=FH2-81	
LVmin=LKmin			
FB1=W+25			
FB2=A-16			
GB1=FB1-38			
GB2=FB2-38			

The door leaves must be made from material which do not bear any potential risk of injoury in any case of breakage (for example single sheet toughened savety glass, compound safety glass etc.). Transparent door leaves must be clearly labelled to be recognised as such.

* Safety margin according to national regulation

Anodize/color: _____ layer thickness: _____ Additional info: _____

RAL : _____

Object:

Customer:

Order-Nr.: Date: Releasesignatur:

Scale %

Drawn	27.11.19	MURO
ok to print	.	.

Operatortyp: Profilsystem Execution

2203-ER LR22B with fixedwing, lintel

TORMAX AUTOMATIC

TORMAX a Division of LANDERT Group AG
CH-8180 Bülach-Zürich

Document number.: T3_390_781

Index .