1:20

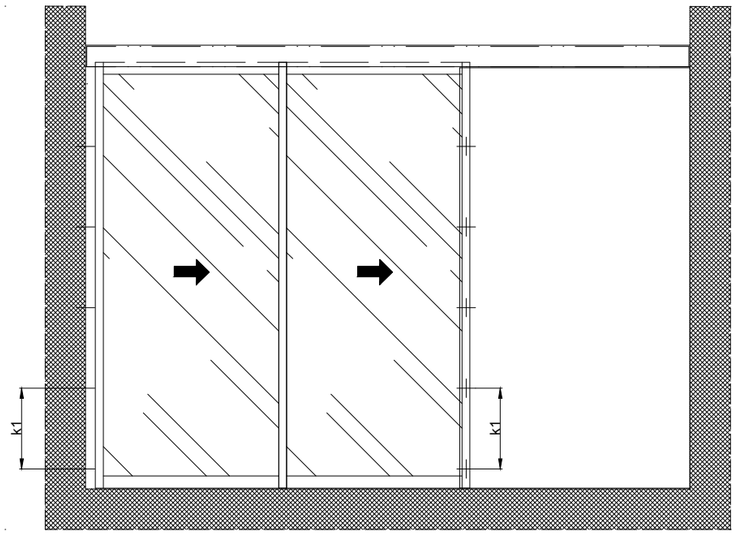





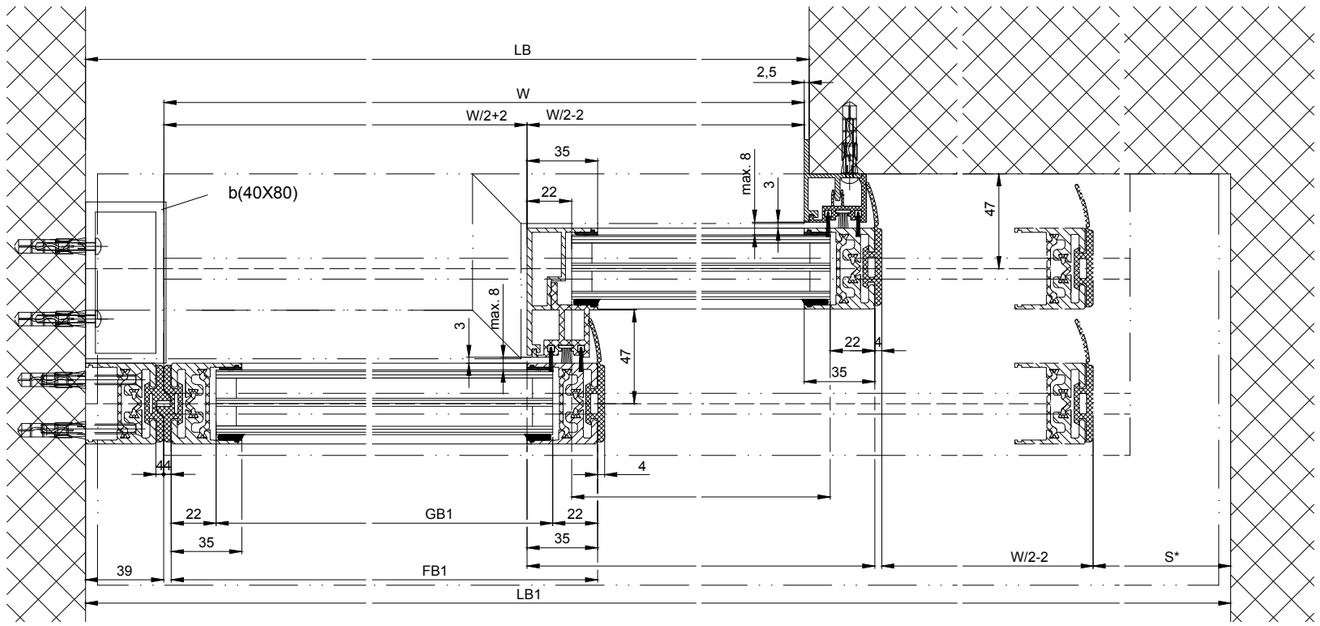


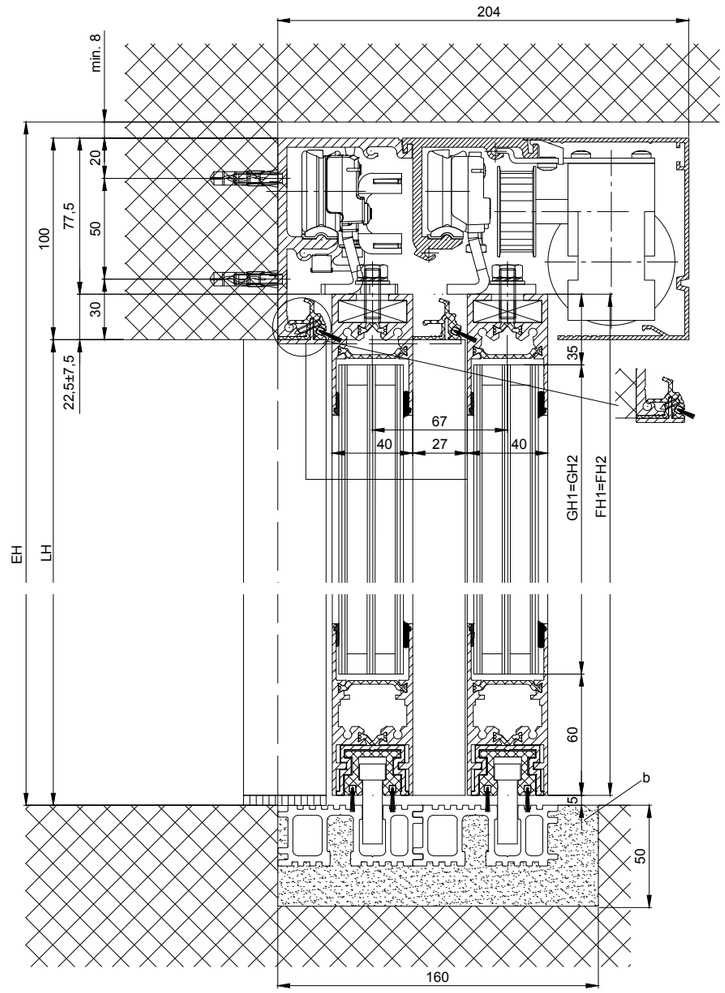


**Variants of the drive cross section:**
- Header profile 2101/2201/2202
- Header profile 2101/2201/2202 H100 (according to drawing)

The door leaves must be made from material which do not bear any potential risk of injoury in any case of breakage (for example single sheet toughened savety glass, compound safety glass etc.). Transparent door leaves must be clearly labelled to be recognised as such.

* Safety margin according to national regulation

Anodize/colon layer thickness: _____ Additional info:
_____ RAL : _____ _____

Object:

Customer:

Order-Nr.: Date: Releasesignatur:

b Executed on site

k1 Distance, type and number of fixing screws are to be defined due to the building's material structure and the necessary stability

| | | | |
|---|---|---|---|
| LB1=1.5W+76+S | | FB1=W/2+33 | |
| W=(LB1-S-76)/1.5 | | FB2=W/2+33 | |
| LB=W+41.5 | | GB1=FB1-44 | |
| LVmin=LB1-12 | | GB2=FB2-44 | |
| LKmin=LVmin-2 | | | |
| | | FH1=FH2=LH+17.5 | |
| | | GH1=FH1-95 | |
| | | GH2=FH2-95 | |

| Scale | Drawn | 11.02.2020 | MURO |
|---|---|---|---|
| % | ok to print | . | . |

Operatortyp: Profilsystem Execution
2203 TR-LR32THERM without fixedwing, lintel

TORMAX AUTOMATIC
TORMAX a Division of LANDERT Group AG
CH-8180 Bülach-Zürich

Document number.: T3-390-796

Index .