

iMotion® 2401 Sliding Door Drive



intelligent



modular



ecological



reliable



economical

Areas of application	external and internal doors – very high door leaf weights – high traffic levels
Versions	– linear – curved – IP65/IP68 – telescope – RER
Options	– operating unit with 6 operating modes – electro-mechanical lock – four-point lock – magnetical interlock – electrical emergency operation – mechanical emergency opening – air lock/porch wind screen function – step control – emergency closing
Drive type	electromechanical
Motor	AC gearless synchronous motor, ext. rotor
Control system	control system 2401 MCU32
Mains connection	1 × 230/1 × 115 VAC, 50 ... 60 Hz, 10 A
Power consumption	8 ... 310 W
Inputs	8 programmable inputs, of which 4 testable safety features, expandable by modules
Outputs	3 programmable outputs, expandable by modules
Sensor power supply	24 V DC
Safety facilities	the necessary sensors can be connected, monitored force limitation
Interfaces	LIN Bus, CAN Bus, RS232
Approvals	CE incl. RoHS, TÜV, ETL
Standards	DIN 18650/EN 16005, EN 13849-1, EN IEC 60335-1, EN 61000-6-2, EN 61000-6-3, UL 325
Durability	class 3 to DIN 18650-1: 2010
Protective class (drive)	IP 22
Ambient temperature	–20 °C to +50 °C

Dimensions	
Cross-section of header profile (H × D)	200 × 185 mm
Cross-section of header profile telescopic (H × D)	200 × 275 mm
System length, single-leaf	min. 1640 mm
System length, double-leaf	min. 2280 mm
System length, telescopic, double-leaf (opening on the left)	min. 1270 mm
System length telescopic, double-leaf (opening on the right)	min. 1243 mm
System length, telescopic, four leaves	min. 2213 mm

Maximum leaf weights	
Single-leaf	1 × 450 kg / 1 × 200 kg ¹⁾
Double-leaf	2 × 300 kg / 2 × 220 kg ¹⁾
Telescopic, double-leaf	2 × 120 kg / 2 × 120 kg ¹⁾
Telescopic, four leaves	4 × 100 kg / 4 × 100 kg ¹⁾


Opening widths	
Single leaf	800 ... 2800 mm ²⁾
Double-leaf	1100 ... 3000 mm ²⁾
Telescopic, double-leaf	700 ... 3800 mm ²⁾
Telescopic, four leaves	1400 ... 3800 mm ²⁾

Opening speed	4 ... 100 cm/s ³⁾
Closing speed	4 ... 80 cm/s ³⁾


¹⁾ for rescue and escape routes (RER)

²⁾ larger opening widths on request

³⁾ per door leaf, dependent on the door weight, opening width and the prevailing regulations

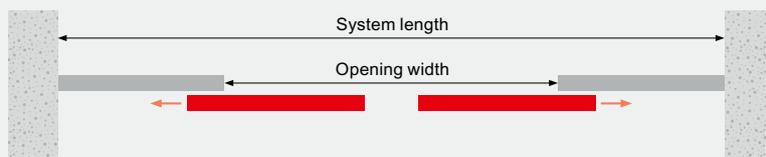

Plan view (double-leaf with fixed leaf)



Cross-section